Electrolux PROFESSIONAL

myPRO
Taking care of business

myPRO Edge Washer extractor WE2–9



Images shown are a representation of the product only and variations may occur.

Perfect for businesses with steady daily laundry needs, up to 4 cycles per day, such as

- Hotels, bed & breakfasts, and guesthouses
- Restaurants, cafés, and food-service operators
- Kindergartens, nurseries, daycare
- Hairdressing, beauty, and wellness salons
- Sports, fitness, and leisure facilities
- Cleaning and facility-management companies
- Out-of-home resident services, care environments, veterinary clinics and many more

Features and benefits

- Plug-and-play installation with 9 kg capacity and flexible setup options, including pump or gravity-valve configurations*
- Best wash results and garment care due to unique professional drum with 4.5 mm holes for efficient evacuation of debris*
- Professional program selection including specialized disinfection, mop and steam programs
- Up to half the cycle time**, delivering high performance in a compact footprint
- Time saver: Cotton 60°C completed in just 75 minutes using the hot water inlet, reducing cycle time by 17 minutes compared to cold water
- Stainless-steel front and top panels contribute to robust, long-term reliability
- Fully compliant with EU Machinery Directive 2006/42/EC, ensuring safe and appropriate commercial use

* Ideal for facility management and care segment.

** Compared to domestic machines.

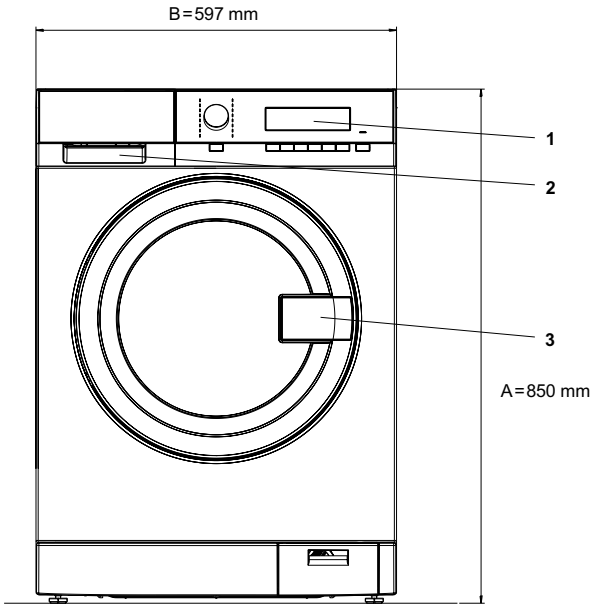
Main specifications		WE2–9
Washing capacity	kg	9
Drum, volume	l	70
Energy efficiency class		A
Consumption data[1]		
Total time (hot inlet)	min./cycle	75
Energy consumption (hot inlet)	kWh	0.7
Total water consumption	l	68

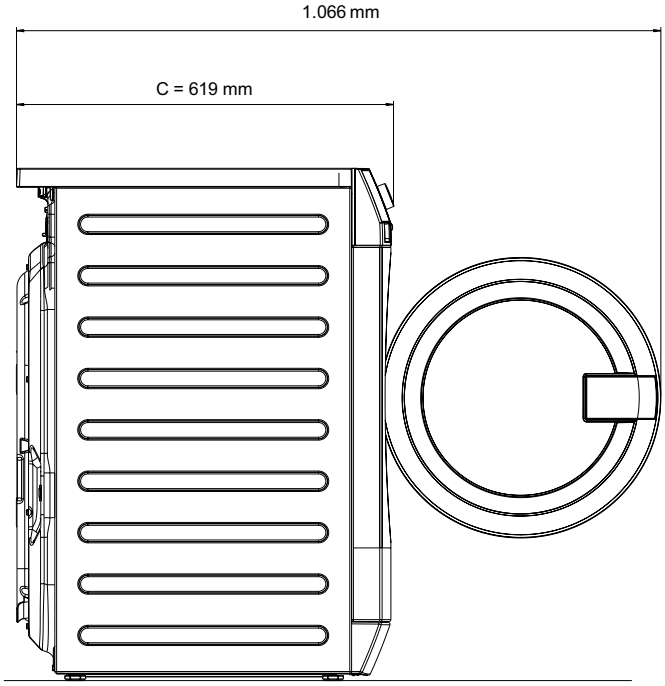
1. Cotton 60, 100% cotton 9 kg

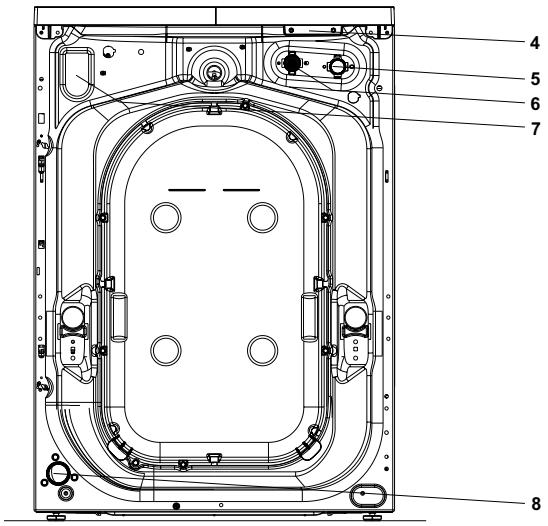
Feature		WE2–9
Spin speed	rpm / G-factor	1.400 / 536
Total power	kW	1.75 / 2.1[1]
Main voltage	V	200 / 220-240[1]
Frequency	Hz	50 / 60[1]
Washing noise level	dB(A)	51
Spinning noise level	dB(A)	75
Water inlet		Hot & cold
Draining system		Drain pump / drain valve[1]
Detergent compartments		3
Drum light		LED
Levelling feet		4 adjustable feet (adjustable by 15 mm)
Number of programs		16
Number of additional functions		6
Program proportionality		Adapts to full or partial load

1. Availability of configurations varies by market.

Dimensions		WE2–9
Weight	kg	80.5
Weight, with packaging	kg	82
Packaging height	mm	900
Packaging width	mm	640
Packaging depth	mm	710
1. Operating panel		
2. Detergent box		
3. Door opening		
4. Liquid detergent supply		
5. Hot water		
6. Cold water		
7. Drain pump		
8. Drain valve		


B=597 mm
1
2
3
A=850 mm


1.066 mm
C = 619 mm


4
5
6
7
8

Accessories

- Base with pull out drawer
- Stacking kit with pull out shelf
- Liquid detergent dosing external connection box
- Marine kit

We reserve the right to alter specifications without notice